(19) World Intellectual Property **Organization**

International Bureau





(43) International Publication Date 6 May 2005 (06.05.2005)

PCT

(10) International Publication Number WO 2005/039794 A1

B21C 47/30, (51) International Patent Classification⁷: 47/32

(21) International Application Number:

PCT/IB2005/000105

(22) International Filing Date: 18 January 2005 (18.01.2005)

English (25) Filing Language:

(26) Publication Language: English

(30) Priority Data:

19 January 2004 (19.01.2004) UD2004A000007 IT

(71) Applicant (for all designated States except US): DANIELI & C. OFFICINE MECCANICHE SPA [IT/IT]; Via Nazionale, I-33042 Buttrio (IT).

(72) Inventors; and


(75) Inventors/Applicants (for US only): BORDIGNON, Giuseppe [IT/IT]; Via Roma, 10/2, I-33050 Bicinicco (IT). PAIARO, Ivan [IT/IT]; Via del Capitello, 75, I-34077 Ronchi Dei Legionari (IT). DE LUCA, Andrea [IT/IT];

Via Candotti, 61, I-33047 Remanzacco (IT). POLONI, Alfredo [IT/IT]; Via G. Paolini, 29, I-34070 Fogliano Redipuglia (IT).

- (74) Agents: PETRAZ, Gilberto et al.; GLP SRL, Piazzale Cavedalis, 6/2, I-33100 Udine (IT).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEVICE AND METHOD FOR FORMING COILS OF ROLLED OR DRAWN LONG PRODUCTS

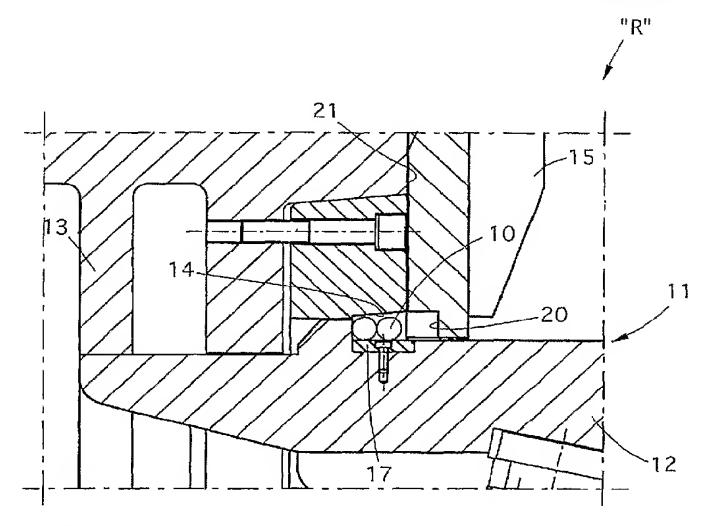

(57) Abstract: Coiling device ("R") and relative method for a windable long, metal product (10). The device ("R") comprises a mandrel (12) having a substantially circular transverse section and rotating around a horizontal, vertical or inclined axis, a containing element (13) to contain the metal product (10) arranged in correspondence with the mandrel (12) and substantially orthogonal to the axis, and at least a guide and containing device (15, 16) able to be driven between a first working position wherein it cooperates with the mandrel (12), and a second inactive position wherein it is arranged distant from the mandrel (12). The containing element (13) comprises an annular channel (14) made in proximity with an outer surface of the mandrel (12). The guide and containing device (15, 16) comprises a groove (20) which defines an accompanying guide for the metal product (10) along an outer circumference of the mandrel (12) towards the annular channel (14), when the guide and containing device (15, 16) is in the first working position.

WO 2005/039794 A1



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- upon request of the applicant, before the expiration of the time limit referred to in Article 21(2)(a)

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.